

1x13 MEMS Optical Switch

OPNETI 1x13 MEMS switch is based on MEMS technology . The component makes an optical connection between an optical port and either one of 13 input or output line. The highly reliable switching mechanism use integrated micromirrors and feautre below 1ms switching time and only 2.0 dB insertion loss. The switch is powered by a 5V supply voltage. A 5 V TTL or CMOS drive signal is used to control the swithcing state

Features

Low insertion loss
 High Crosstalk
 Fast response time
 Mini Size

Applications

Optical Reconfiguration
 Instrumentation
 Provisioning

Specifications


Parameter	Single mode	Multimode
Wavelength range (nm)	1240~1640	700~1700
Insertion loss (dB)	≤2.0 (Typ 1.3)	≤3.0 (Typ 1.5)
Polarization dependent loss (dB)	≤0.15	≤0.25
Return Loss (dB)	≥ 45 (Typ 55)	≥ 35 (Typ 45)
Cross talk (dB)	≥ 60 (Typ 75)	≥ 45 (Typ 55)
Switch speed (ms)	≤1, (Typ 0.5)	≤20, (Typ 2)
Repeatability (dB)	≤0.002	≤0.002
Durability (cycles)	no wear out	no wear out
Fiber type	SMF-28e	50/125, 62.5/125 MM
Operating Voltage (V)	<5	<5
Power Consumption (mW)	Typ. 150	Typ.150
Operation temperature()	0~70 C	0~70 C
Storage temperature ()	-40~85	-40~85
Package Size (L x W x H) (mm)	144 x 105 x 10	144 x 105 x 10

PIN Connection

PIN Port Selection

S1	S2	S3	S4	S5	S6	Port
0	5	x	0	0	x	1
0	5	x	5	x	5	2
0	5	x	5	x	0	3
0	5	x	0	5	x	4
5	x	0	0	0	x	5
5	x	0	5	x	5	6
5	x	0	5	x	0	7
5	x	0	0	5	x	8
5	x	5	0	0	x	9
5	x	5	5	x	5	10
5	x	5	5	x	0	11
5	x	5	0	5	x	12
0	0	x	x	x	x	13

0 = 0 V (TTL or CMOS level)
 5 = 5 V (TTL or CMOS level)
 x = 0 V or 5 V

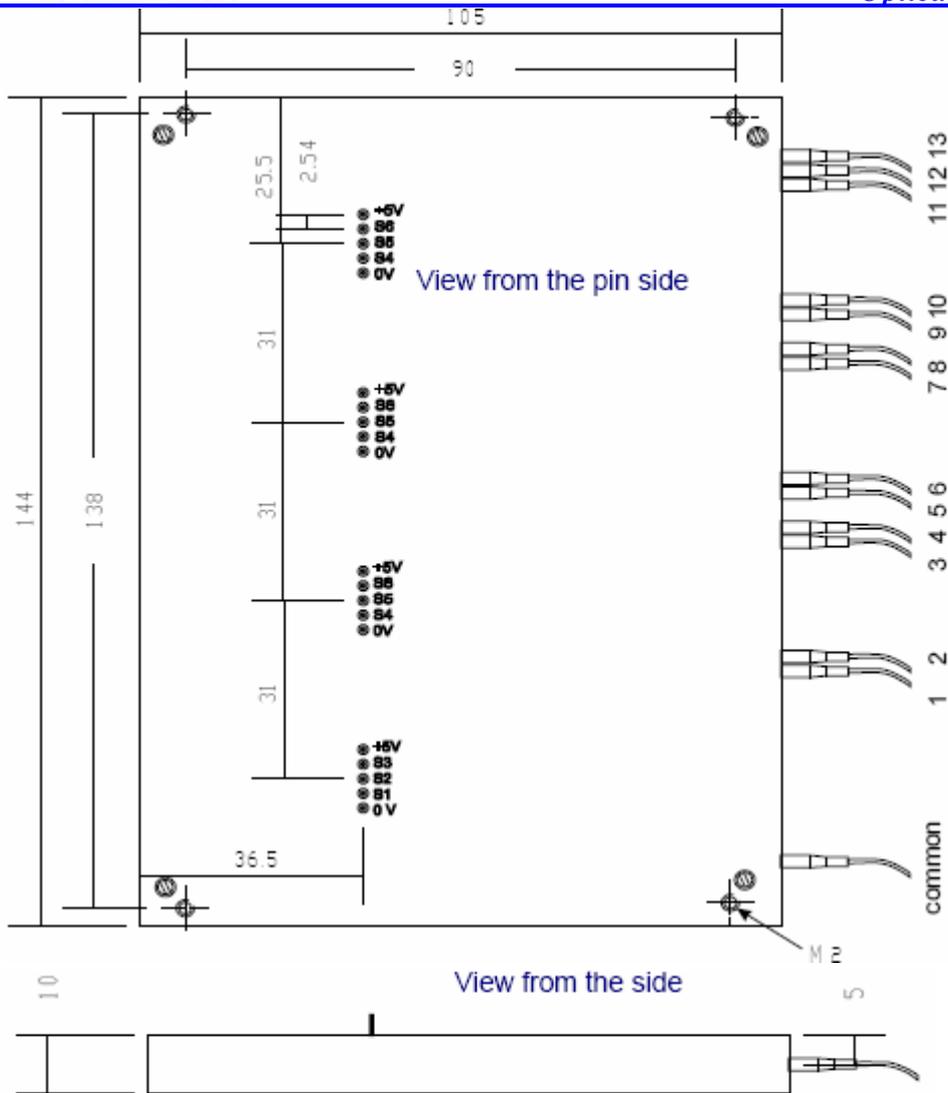

Ordering Information

MSW	Port Type	Wavelength	Mode	Pigtail Type	Fiber Type	Length	Connector
	1x12 1x13	1240~1640 700~1700	N=Non-Latching	900=900um loose tube	1=SMF-28e 2=50/125 3=62.5/125	1=1.0m	NE=None FA=FC/APC FC=FC/PC SA=SC/APC SC=SC/PC ST=ST/PC LC=LC/UPC XX: Specify