


Singlemode Pump Laser Protector

Features	
Low Insertion Loss	
High Power	
High stability and reliability	
Application	
Fiber Laser	

Specifications

Parameter	Values
Pump laser Wavelength (nm)	915 or 975
Bandwidth (nm)	± 15
Insertion Loss (dB)	≤ 0.5 (Typ 0.3)
Operating Signal Wavelength (nm)	1020~1120
Backward Signal Attenuation	≥ 50
Return loss (Input/output) (dB)	$\geq 50/50$
Power handling (W)	10
Fiber Type	HI1060
Operating temperature (°C)	-5 ~ +65
Storage temperature (°C)	-40 ~ +85
Package(mm)	58x10x8

Package Dimensions

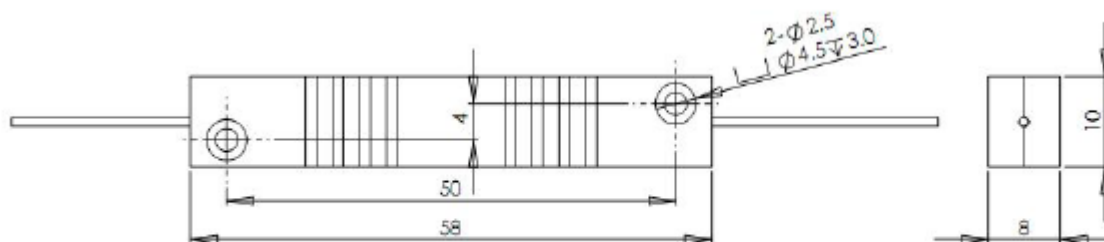

Ordering Information

PLP	Wavelength	Pigtail Type	Fiber Type	Length	Power
	915 975	900=900um loose tube	4=HI1060	0.8= 0.8m	10=10W